


7610 Series

GLASS TUBE

7610 models feature fully enclosed, 127 mm scale, borosilicate glass metering tube with 304 stainless steel case. In-line 316L fittings and internals or PVC fittings with Hastelloy® C-276 internals are suitable for a variety of applications.

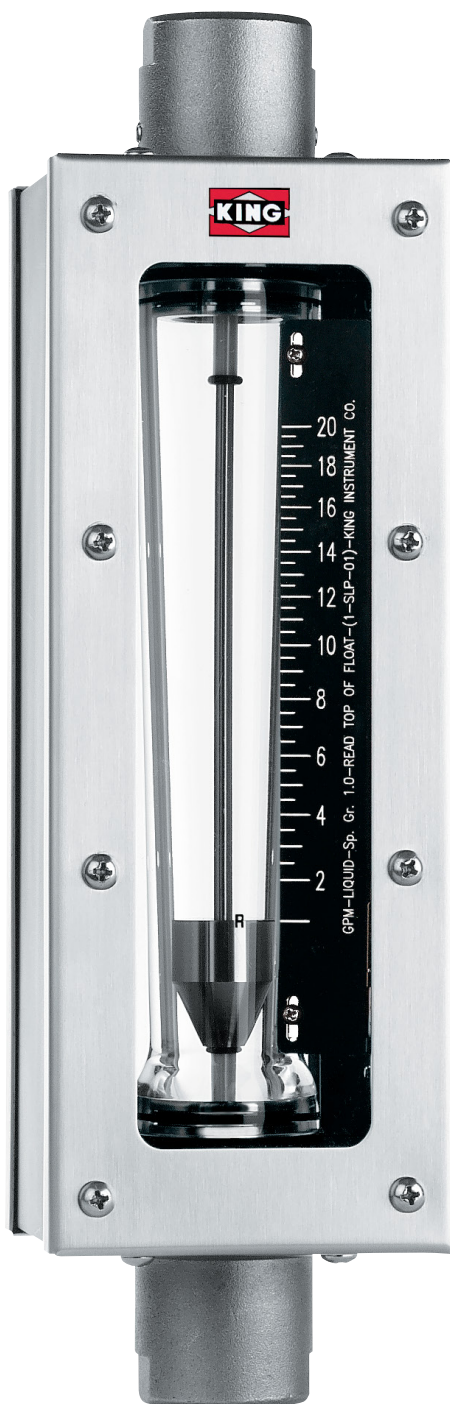

DESCRIPTION

Metering Tube	Borosilicate Kinglass
Internal Components	Standard: 316L SS Optional: Hastelloy® C-276
Fitting Material	Standard: 316L SS Optional: PVC
Inlet/Outlet Fittings	FNPT, vertical
O-Ring	Standard: Viton® Optional: Buna N, EPR, and Kalrez®
Case and Covers	304 SS case Polycarbonate shield


PERFORMANCE

Capacities	Water	0.25 to 116 GPM
	Air	1 to 245 SCFM
Scale	127 mm (5") direct reading, detachable	
Accuracy	± 3% of full scale flow	
Turndown	10:1	
Repeatability	0.5%	
Maximum Temperature	316L SS fittings	200° F (93° C)
	PVC fittings	110° F (43° C)
Maximum Pressure	316L SS fittings	250 psig, size 3 & 4
	316L SS fittings	200 psig, size 5 & 6
	316L SS fittings	150 psig, size 8 & 9
	PVC fittings	100 psig
Ambient Temperature	33° F to 125° F (1° C to 52° C)	

OPTIONS

Alarm	Latching Reed Switch (Page 55)
Certified Calibrations	Conform to ISA RP 16.6
Scales	Any volumetric unit

FLOATS

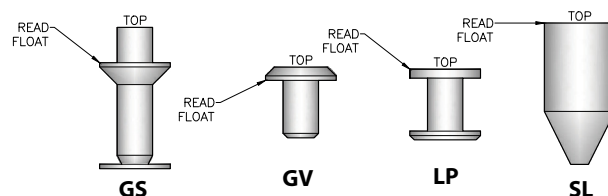

7610 Specifications

GLASS TUBE



Order No.	Full Scale Flow GPM - Water	Full Scale Flow SCFM - Air	Alarm Option	Float Number	Float Type	Pressure Drop (Inches of Water)	Tube Size Number*
31	.25	1.0	No	3/8 -LPG-01	LP	—	3G - 3/8-20-G-5
32	.36	1.5	No	3/8 -SLG-01	SL	2	3G - 3/8-20-G-5
33	.74	3.0	No	3/8 -SLG-02	SL	5	3G - 3/8-20-G-5
41	1.0	4.2	No	1/2 -LPG-01	LP	6	4G - 1/2-27-G-5
43	2.0	8.2	Yes	1/2 -SLG-01	GS	10	4G - 1/2-27-G-5
51	1.5	6.0	No	3/4 -LPG-01	LP	3	5G - 3/4-30-G-5
52	3.8	16.0	Yes	3/4 -GSG-01	GS	10	5G - 3/4-30-G-5
53	5.0	21.5	Yes	3/4 -SLG-01	SL	14	5G - 3/4-30-G-5
61	6.0	25.5	No	1-GVP-01	GV	5	6P - 1-33-P-5
62	7.4	30.0	No	1-GVP-02	GV	6	6P - 1-33-P-5
63	9.6	40.0	No	1-GSP-01	GS	10	6P - 1-33-P-5
64	11.0	45.0	No	1-GSP-02	GS	13	6P - 1-33-P-5
65	14.0	62.0	No	1-GSP-03	GS	24	6P - 1-33-P-5
66	20.0	90.0	Yes	1-SLP-01	SL	39	6P - 1-33-P-5
67	26.0	—	Yes	1-SLP-02	SL	45	6P - 1-33-P-5
81	22.0	90.0	Yes	1 1/2-GVP-01	GV	16	8P - 1 1/2-34-P-5
82	44.0	180.0	Yes	1 1/2-SLP-01	SL	30	8P - 1 1/2-34-P-5
83	61.0	250.0	Yes	1 1/2-SLP-02	SL	40	8P - 1 1/2-34-P-5
91	41.0	160.0	Yes	2-GVP-01	GV	5	9P - 2-33-P-5
92	60.0	245.0	Yes	2-GSP-01	GS	16	9P - 2-33-P-5
93	86.0	—	Yes	2-SLP-01	SL	25	9P - 2-33-P-5
94	116.0	—	Yes	2-SLP-02	SL	45	9P - 2-33-P-5

* Tubes designated "G" have rib-guided floats.

Tubes designated "P" have pole-guided floats.

Order Number	Dimensions (Inches)				Connection Size FNPT
	A	B	C	D	
31 - 43	11.875	3.15	3.125	9.50	1/2"
51 - 67	13.75	3.95	3.90	10.60	1"
81 - 94	16	5.312	5.375	11.80	2"

DIMENSION DIAGRAMS

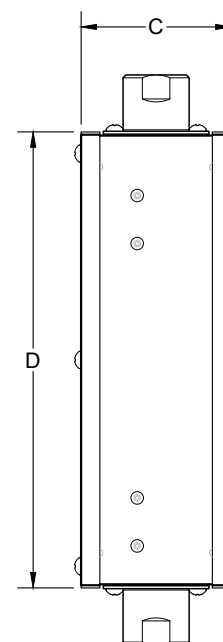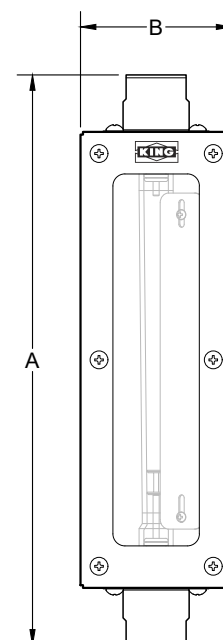

ORDERING:

Use the following guide to determine the specific product number you require.

Meter Series	Fitting Material	Float Material	O-Ring Material	Alarm	Order Number	Scale
7 6 1	316L SS - 2 PVC (not for air service) - 3	316L SS - 2 Hastelloy® C-276 - 4	EPR - 1 Buna-N - 2 Viton® - 3 Kalrez® - 4	No Alarm - 0 Alarm - A	See Specification above	Water GPM - W Air SCFM - A Non Standard - N