

7750 Series

STAINLESS STEEL TUBE

These 316L stainless steel meters feature flange connections, all welded construction (no O-rings), and an end to end length of 250mm. A float and tapered tube design provides longer, more linear scales. A 4-20mA transmitter option adds to its versatility.



DESCRIPTION

Overall Length	250 millimeters
Metering Tube	316L SS
Internal Components	316L SS
Inlet/Outlet Fittings	150# or 300# flange, vertical
O-Ring	All welded construction, no O-rings or gaskets
Indicator Housing	Die-cast Aluminum / Powder Coated with Chemfilm base (RoHS Compliant) Rated IP66 (Excludes Alarm and Transmitter Cases)
Flange Material	316L SS
Scale	120 mm direct reading, detachable

PERFORMANCE

Capacities	Water 33 GPH to 16.5 GPM Air 2.2 SCFM to 76 SCFM		
Scale	120 mm direct reading, detachable		
Accuracy	± 3% of full scale flow		
Turndown	10:1		
Repeatability	1%		
Maximum Temperature	400° F (204° C)		
	Temp F	150#	300#
	200°	225 psi	600 psi
	300°	200 psi	540 psi
	400°	180 psi	515 psi
Maximum Pressure	See 150# and 300# SS flange class above		
Ambient Temperature	-40° F to 400° F (-40° C to 204° C)		

OPTIONS

Alarm	Single or dual, Inductive Slot Sensor (Page 57) 4-20 mA transmitter (Page 58)
Certified Calibrations	Conform to ISA RP 16.6
Scales	Any volumetric unit



7750 Specifications

STAINLESS STEEL TUBE

Order Number	Full Scale Flow GPM-Water	Meter
06	33.0 GPH	½"
08	1.1 GPM	½"
10	2.0 GPM	½"
12	4.0 GPM	½"
16	5.0 GPM	1"
18	10.0 GPM	1"
20	16.5 GPM	1"

Order Number	Full Scale Flow SCFM - Air	Meter
05	2.2 SCFM	½"
07	4 SCFM	½"
09	8 SCFM	½"
11	16.5 SCFM	½"
15	20 SCFM	1"
17	42 SCFM	1"
19	76 SCFM	1"

DIMENSION DIAGRAMS

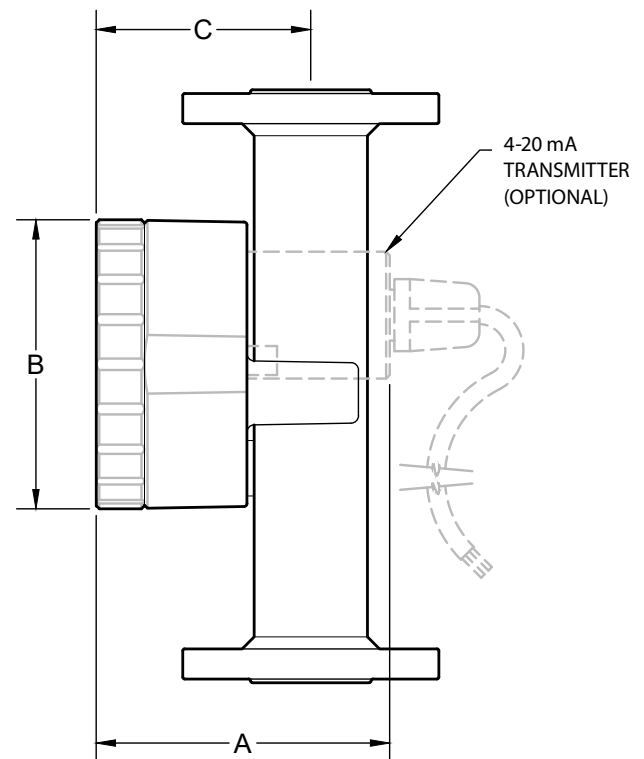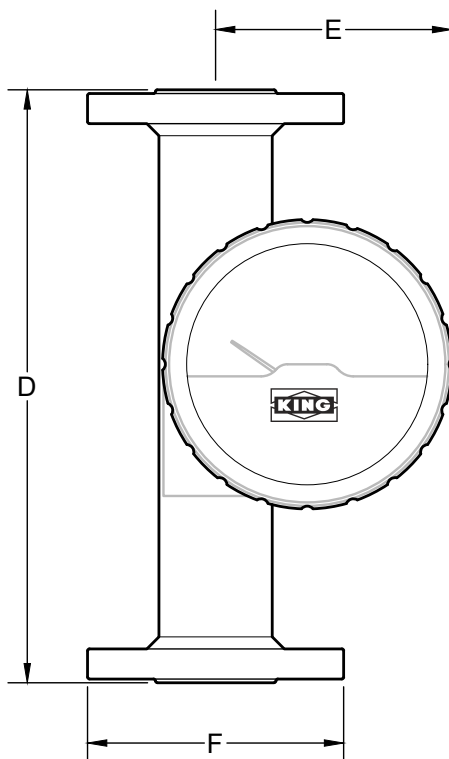

Order Number	Meter	Dimensions (Inches)					150 # Flange	300 # Flange
		A	B	C	D	E	F	F
05 - 12	½"	4.87	4.80	3.27	9.84	3.67	3.50	3.75
15 - 20	1"	4.87	4.80	3.56	9.84	3.92	4.25	4.88

ORDERING:

Use the following guide to determine the specific product number you require.

Meter Series	Connection Type	Float Material	O-Ring Material	Alarm/Transmitter	Scale	Order Number
7 7 5	150# R.F. Flanged - 2 300# R.F. Flanged - 3	316L SS - 2	No O-ring - 0	None - 0 With Transmitter - T One Alarm - A Two Alarms - D	Standard - 7 Non Standard - N	See Specifications