


7510 & 7511 Series Flowmeters

Acrylic block construction with direct reading scales have white screen printed backs to enhance scale readability. Connections are in-line for easy installation.

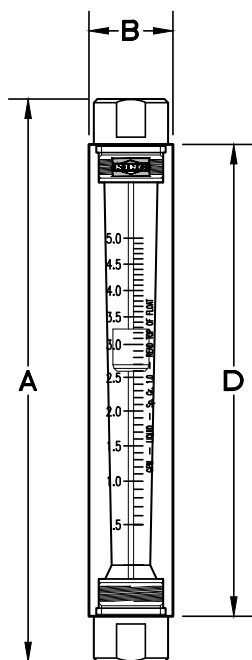

DESCRIPTION

Metering Tube
Machined Cast Acrylic

Internal Components
316L Stainless Steel

Inlet/Outlet Fittings
FNPT, Vertical

Fitting Material
Standard: PVC
Optional: 316L Stainless Steel, Brass

Elastomers
Standard: EPR
Optional: Buna N, Viton

PERFORMANCE

Capacities
7 GPH to 20 GPM — Water
2.6 SCFH to 60 SCFM — Air

Scale
50mm, 65mm, 100mm,
127mm, 250mm
Direct reading

Accuracy
± 6% of Full Scale Flow, 50mm scale
± 5% of Full Scale Flow, 65mm scale
± 4% of Full Scale Flow, 100mm scale
± 3% of Full Scale Flow, 127mm scale
± 2% of Full Scale Flow, 250mm scale

Turndown
10:1 unless otherwise indicated

Repeatability
3%, 50 mm scale
2%, 75 mm scale
2%, 100 mm scale
2%, 127 mm scale
0.5%, 250 mm scale

Max Temperature
130° F (54° C) - Liquid
100° F (38° C) - Gases

Max Pressure
Water — 125 psig
Air — 100 psig

Ambient Temperature
33° F to 125° F (1° C to 52° C)

OPTIONS

Certified Calibrations
Conform to ISA RP 16.6

Scales
Can be produced in any volumetric unit

SPECIFICATIONS:

Order Number	Flow Water	Order Number	Flow Air	Connection Size	Dimensions (Inches)		
					A	B	D
Block #2A, 50mm (2 Inch) Scale							
—	—	2A-01	2.6 SCFH	1/4" FNPT*	4.75	1	3.50
—	—	2A-03	5 SCFH	1/4" FNPT*	4.75	1	3.50
—	—	2A-05	10 SCFH	1/4" FNPT*	4.75	1	3.50
—	—	2A-07	20 SCFH	1/4" FNPT*	4.75	1	3.50
2A-02	7 GPH	2A-09	30 SCFH	1/4" FNPT*	4.75	1	3.50
2A-04	12 GPH	2A-11	70 SCFH	1/4" FNPT*	4.75	1	3.50
2A-06	22 GPH	2A-13	100 SCFH	1/4" FNPT*	4.75	1	3.50
2A-08	44 GPH	2A-15	180 SCFH	1/4" FNPT*	4.75	1	3.50
2A-10	60 GPH	2A-17	4 SCFM	1/4" FNPT*	4.75	1	3.50
2A-12	75 GPH	—	—	1/4" FNPT*	4.75	1	3.50
Block #2B, 65mm (2 1/2 Inch) Scale							
2B-02	1 GPM	2B-01	4 SCFM	1/2" FNPT	6.50	1.375	5
2B-04	2 GPM	2B-03	8 SCFM	1/2" FNPT	6.50	1.375	5
2B-06	3.6 GPM	2B-05	15 SCFM	1/2" FNPT	6.50	1.375	5
2B-08	5 GPM	2B-07	20 SCFM	1/2" FNPT	6.50	1.375	5
Block #5B, 127mm (5 Inch) Scale							
5B-02	1 GPM	5B-01	4.2 SCFM	1/2" FNPT	9.25	1.375	7.75
5B-04	2 GPM	5B-03	8.2 SCFM	1/2" FNPT	9.25	1.375	7.75
5B-06	3.5 GPM	5B-05	15 SCFM	1/2" FNPT	9.25	1.375	7.75
5B-08	5 GPM	5B-07	21 SCFM	1/2" FNPT	9.25	1.375	7.75
Block #6A, 100mm (4 Inch) Scale							
6A-02	10 GPM	6A-01	40 SCFM	1" FNPT	8.375	1.78	6.625
6A-04	15 GPM	6A-03	60 SCFM	1" FNPT	8.375	1.78	6.625
6A-06	20 GPM	—	—	1" FNPT	8.375	1.78	6.625
Block #7A, 250mm (10 Inch) Scale							
7A-02	2 GPM	7A-01	8 SCFM	3/4" FNPT	14.812	1.78	13
7A-04	3.5 GPM	7A-03	14.8 SCFM	3/4" FNPT	14.812	1.78	13
7A-06	5 GPM	7A-05	20 SCFM	3/4" FNPT	14.812	1.78	13
7A-08	10 GPM	7A-07	42 SCFM	3/4" FNPT	14.812	1.78	13

*Block 2A has 1/4" FNPT with Brass or Stainless Steel Fitting, 1/4" MNPT with PVC fittings

**10-32 female thread. (Mounting Screws Not Supplied)

ORDERING:

Use the following guide to determine the specific product number you require.

Meter Series	Fitting Material	O-Ring Material	Order Number
7510 - 2A, 6A, 7A	Brass - 1	EPR - 1	See Specifications
7511 - 2B, 5B	PVC - 2	Buna-N - 2	Table
	316L SS - 3	Viton - 3	